



TEST REPORT

Lab Protocol	
Number	LP-G02-01.06.01
Description	ASTM F2057-23 Standard safety for Clothing Unit Test (Outlook Protocols)
Reference	ASTM F2057 - 2023

Customer Data	
Customer	Phuong Nguyen Co., Ltd
Contact	Mr. Tri
Email	mtri1987@gmail.com
Retailer/Brand	Butler Specialty Company


Report Number	TR-D23-01018
Report Date	Oct 25, 2023
TAF Number	TA-D2310-0799
Date In	Oct 24, 2023
Lab	HCMC
Test Technician	Bush Huynh
Report Author	David Nguyen

RESULT			
PASS	X	FAIL	
INFO		COND	

Vendor Data			
Name	Phuong Nguyen Co., Ltd	Contact	Mr. Tri
Email	mtri1987@gmail.com	Tel:	+ 84 908 464 088

Product Data			
Item Description	3 drawers chest		
SKU Number	5392	Affiliated SKU's	/
PO Number	Not provided	Country of Origin	Viet Nam

Reason for Testing			Environmental Conditions		
Sampling Stage	<input type="checkbox"/> New Development	<input type="checkbox"/> Pre-production	<input checked="" type="checkbox"/> Production	Temperature (C°/F°)	36/96.8
Test History	<input type="checkbox"/> First time test	<input checked="" type="checkbox"/> Retest, Original TR No.: TR-D23-00965		RH (%)	46

Test Specimen Picture	Test Result Summary
	<p>The item passed Permanency of Labels and Warnings Testing, Stability Test (<i>Simulating a Reaction on Carpet with Child Weight</i>) and Tip Over Restraint Test. The item has now passed all requested protocols and is rated as an overall PASS.</p> <p>Note: The item was previously tested under TR-D23-00965. Test result(s) from that test report are noted accordingly.</p>

This Report is issued within the provisions and conditions of the Terms and Conditions of Service of Outlook Technical Services PTE Ltd. (OTS) and is intended for the exclusive use of our Client. OTS retains all copyrights and reserves all rights to this document, and as such, this report may only be reproduced or copied with the written consent of OTS. This report describes and delineates the test results as determined by OTS and as described herein. Our findings are based solely on the Client samples submitted to OTS. As such, the results obtained thereof are neither necessarily indicative nor representative of the quality, characteristics, or function of the general lot of goods from which they were selected and provided to OTS by our Client. The tests requested by our Client, and the results thereof, are based upon the information and samples provided by our Client. Any issues or matters of disagreement, concern, or other objections as to our findings must be reported in writing to OTS no later than thirty days from the Date of Issue of this report. Failure to declare such issues and matters within this time period will serve as unqualified acceptance of this report, the tests as conducted, and their validity thereof.




TEST REPORT

Physical Characteristics			
Weight (KG/LB)	55.10/121.22	Material Type	/

Dimensional Overview			
Primary Dimensions		Storage Spaces Dimension	
Whole Product (LxWxH)	34" x 18 5/8" x 32 1/4"	Number of Door	0
Top Surface (LxW)	34" x 18"	Other Storage Area (DxWxH)	/
Leg Height	/	Other Storage Area (DxWxH)	/
Leg Thickness	/	Number of Shelves (Fixed)	0
Length of drawer rail	/	Number of Shelves (Movable)	0
Length of drawer when open	/	Fixed Shelf Dimensions	/
		Fixed Shelf Dimensions	/
		Movable Shelves Dimensions	/
		Movable Shelves Dimensions	/

Determine the load weigh in the drawers (Extendible Element)					
Extendible element height (HE) is 1/8 in. (3 mm) less than the smallest measurement from the top of bottom panel to the lowest point on the next obstruction above the extendible element at any point of the travel following the opening instructions in 8.1.3.					
Drawer Design 1		Drawer Design 2		Drawer Design 3	
Drawer bottom depth (in)	14 1/4	Drawer bottom depth (in)	/	Drawer bottom depth (in)	/
Drawer bottom width (in)	30	Drawer bottom width (in)	/	Drawer bottom width (in)	/
Drawer Height (in)	7 1/2	Drawer Height (in)	/	Drawer Height (in)	/
Drawer functional volume (ft3)	1.9	Drawer functional volume (ft3)	/	Drawer functional volume (ft3)	/
Test weight (lb)	16.2	Test weight (lb)	/	Test weight (lb)	/
Drawer Design 4		Drawer Design 5		Drawer Design 6	
Drawer bottom depth (in)	/	Drawer bottom depth (in)	/	Drawer bottom depth (in)	/
Drawer bottom width (in)	/	Drawer bottom width (in)	/	Drawer bottom width (in)	/
Drawer Height (in)	/	Drawer Height (in)	/	Drawer Height (in)	/
Drawer functional volume (ft3)	/	Drawer functional volume (ft3)	/	Drawer functional volume (ft3)	/
Test weight (lb)	/	Test weight (lb)	/	Test weight (lb)	/

Volume Calculation Notes
1. Any volume with a height (H) less than 3 in. (76 mm) shall be excluded from all volume calculations.
2. Any continuous volume less than 0.06 ft3 (1.7 dm3) shall be excluded from all volume calculations unless the volume is created by a removable feature, for example, a removable jewellery tray, removable shelf, or other obstruction. In the case of a removable feature, remove such feature and re-evaluate.

Labeling Compliance			
Evaluation	Citation/Method	Criteria	Result
 <p>The label tears into pieces upon removal</p>	Permanency of Labels and Warnings Testing LP-S02-07.43.00	ASTM F2057- 9.3 – 2023 1. A paper label shall be considered permanent if, during an attempt to remove it without the aid of tools or solvents, it cannot be removed, it tears into pieces upon removal, or such action damages the surface to which it is attached. 2. A non-paper label shall be considered permanent if, during an attempt to remove it without the aid of tools or solvents, it cannot be removed, or such action damages the surface to which it is attached. 3. <i>Adhesion Test for Warnings Applied Directly onto the Surface of the Product:</i> 3.1 Apply the tape test defined in Test Method B – Cross-Cut Tape Test of Test Methods D3359 eliminating parallel cuts. 3.2 Perform this test once in each different location where warnings are applied. 3.3 The warning statements shall be considered permanent if the printing in the area tested is still legible and attached after being subjected to this test.	M

ASTM F2057- 10 – 23 (Custom Specifications)

Each clothing storage unit shall be permanently marked in at least one place with the warnings from this section. The warnings shall be in a conspicuous location when in use; the back of the unit intended to be placed against the wall is not considered conspicuous when in use.

Tip Over
Warning Label
LP-S02-07.13.02

PASS
TR-D23-00965





Figure 1. Example warning for Clothing Storage units that are Not designed and intended by the manufacturer to be used with TV

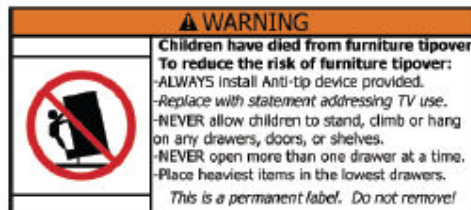

Black/White Version



Figure 2. Example warning For Clothing Storage units that are designed and intended by the manufacturer to be used with a TV.



		<p>Figure 3. Example warning for unit with Interlocks Not Designed and Intended by the Manufacturer to be Used with a TV.</p> <p>Figure 4. Example Warning Billboarded for Use with Interlocks Requiring in Unit Warnings</p>	
--	--	---	--

Legend	M (Meet)	NM (Not Meet)	N/A (Not Applicable)	N/R (Not Requested)	N/C (Not Checked)
---------------	----------	---------------	----------------------	---------------------	-------------------

Physical Tests		
Test Procedure	Criteria/Method	Results
Evaluate Interlock System LP-S02-01.76.00	<p>ASTM F2057 – 9.1 – 23</p> <ol style="list-style-type: none"> Open any doors prohibiting access to the interlocked extendible element. Open an extendible element or the number of elements necessary to engage the interlock. Gradually apply, over a period of at least 5 s, a 30-lbf (133 N) horizontal pull force on each interlocked extendible element at the center of the pull area(s), one element at a time, and hold the force for at least 10 s. 	N/A
	Failure Details	
Stability Test LP-S02-01.77.00	<p>ASTM F2057 – 9.2 – 23</p> <p>1. <i>Simulated Clothing Load:</i></p> <p>1.1 Position the empty unit on test surface described in 8.2.1. For units with levellers, adjust the unit per 8.1.2.</p> <p>1.2 If 50 % or more of the storage volume is extended, determine the weight for loading the extendible elements and/or space behind the doors based on the volume calculated in $Vol (ft^3) = (W (in.) \times D (in.) \times H (in.)/1728) \times 8.5lb$. Load per 8.3.3. If less than 50 % of the storage volume is extended, the unit shall remain empty.</p> <p>1.3 Open all doors and extend all available extendible elements in accordance with 8.1.3. Elements shall remain open for 30 s.</p>	PASS TR-D23-00965
	Failure Details	






TEST REPORT

	<p>2 Simulated Horizontal Dynamic Force:</p> <p>2.1 Force Application on Extendible Element—Where the extendible element has been determined to have the highest hand-hold height, not to exceed 56 in. (1422 mm).</p> <ul style="list-style-type: none"> Apply a 10 lbf (44 N) horizontal force, parallel to the direction of outward motion, at the highest handhold, not to exceed 56 in. (1422 mm) on the extendible element most likely to cause tip over. The force shall be applied within 1/4 in. (6 mm) of the top edge of a drawer or to the centre of the pull area of the extendible element, whichever is higher but less than 56 in. (1422 mm) over a period of at least 5 s and held for 10 s. 	<p>PASS TR-D23-00965</p>
Failure Details		
	<p>2.2 Force Application on Door with Handle/pull—Where the door handle/pull has been determined to be the highest reach point not to exceed 56 in. (1422 mm).</p> <ul style="list-style-type: none"> Apply a 10 lbf (44 N) horizontal force, parallel to the direction of initial outward motion, at a height not exceeding 56 in. (1422 mm) to the handle or pull. The force shall be applied over a period of at least 5 s and held for 10 s. The door shall be in a position most likely to cause the unit to tip over. If the door handle or pull exceeds the max reach height, follow 2.1(3). 	<p>N/A</p>
Failure Details		
	<p>3 Simulating a Reaction on Carpet with Child Weight:</p> <p>3.1 Position the empty unit on test surface described in 8.2.1. For units with levellers, adjust the unit per 8.1.2.</p> <p>3.2 Place the test block(s) under the unit’s most rear floor support(s), such as a leg, foot, or upright.</p> <p>3.3 Test block(s) shall be positioned so the back edge of the test block(s) are flush with the back edge of the rear floor supports. If the rear floor support is a glide tack, leveller, or foot smaller than 1 in., center the block under it.</p> <p>3.4 Open all doors and extend all available extendible elements in accordance with 8.1.3.</p> <p>3.5 Gradually, over a period of at least 5 s, apply the test apparatus without impact over the top of the door or extendible element most likely to cause tip over. Allow the test apparatus to rest without additional support for 30 s. If it is not apparent which door, extendible element, or for clothing storage units with interlock(s), the combination of open and closed extendible elements is most likely to cause tip over, perform multiple tests.</p> <p>3.6 If the extendible element most likely to cause tip over is not the uppermost extendible element, any extendible element obstructing the test weight from being positioned properly shall be closed and reopened to the extent possible. For odd-shaped drawer, apply the test apparatus to the front edge that protrudes the farthest. For doors, apply the test apparatus to each door, one at a time, so that the outer edge of the test weight is flush with the outermost upper corner of the door.</p> <p>Acceptance Level: During the test, the unit shall not tip over or be supported by any component unless that component was specifically designed for that purpose.</p>	<p>M</p>
<div style="display: flex; justify-content: space-around;">   </div> <p style="text-align: center;">The item does not tip over when applying 60lbs over drawer front</p>		
Failure Details		



TEST REPORT

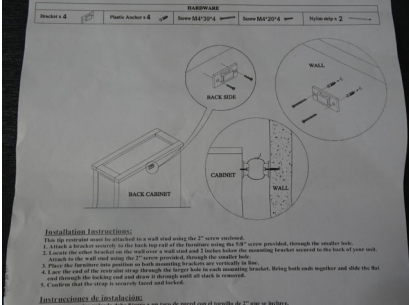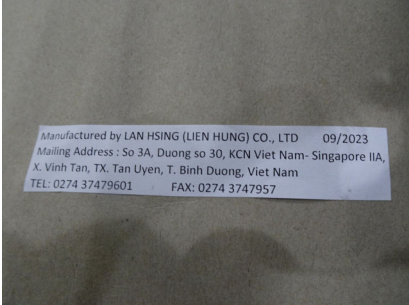Counterweight Load LP-S00-01.57.00	<input type="checkbox"/> Counterweight Load given to pass:	lbs.
Tip Over Restraint Availability LP-S02-01.36.00	<p style="text-align: center;">ASTM F2057 - 4.4 – 23</p> <p>Acceptance Level: An anti-tip device shall be included with each item of furniture covered under the scope of this standard for attachment by the consumer</p>	PASS TR-D23-00965
Tip Over Restraint Test LP-S02-01.37.00	<p style="text-align: center;">ASTM F2057 – 4.5 - 23</p> <p>The anti-tip device provided shall meet the requirement of specification ASTM F3096</p> <p>Acceptance Level:</p> <ul style="list-style-type: none"> Shall withstand a pull force of 60lb. <div style="display: flex; justify-content: space-around;">   </div> <p style="text-align: center;">Assembly instruction and manufacturing information</p>  <p style="text-align: center;">The tip over restraint withstands a pull force of 60lbs.</p> <p style="text-align: center;">Failure Details</p>	M
Legend	M (Meet) NM (Not Meet) N/A (Not Applicable) N/R (Not Requested) CNT (Could Not Test)	



TEST REPORT

For any questions, please contact the lab as follows:

Outlook Technical Services (Viet Nam) Ltd

No. 24, 21st Street, Song Than Residential Area

Di An District, Binh Duong Province, Viet Nam

Tel: +84 274 379-6300

General Inquires and Technical Information:

Rousell Morata – Rousell.Morata@otsglobal.com

Billing Inquires:

Christine Nguyen – Christine.Nguyen@otsglobal.com

OUTLOOK TECHNICAL SERVICES (VIET NAM) LTD.

A handwritten signature in blue ink, appearing to read "Thu Phuong".

Nguyen Thi Thu Phuong
Lab Manager

A handwritten signature in blue ink, appearing to read "Tinh".

Huynh Thanh Tinh
Technical Supervisor