


Maximum capacity : 40 kgs/88 Lbs




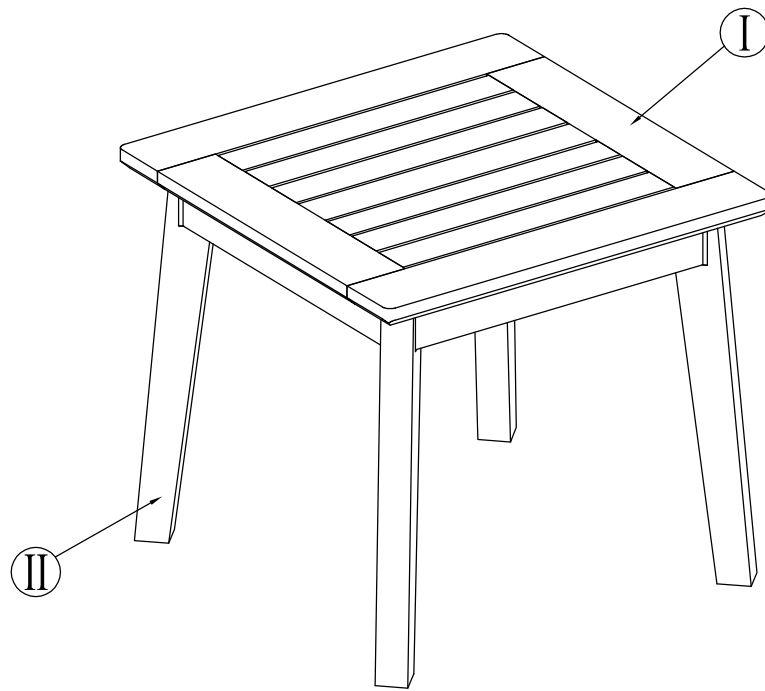

NOTE: 50% TIGHTEN BEFORE FIXING ALL BOLTS & SCREWS


COMPONENTS LIST

I

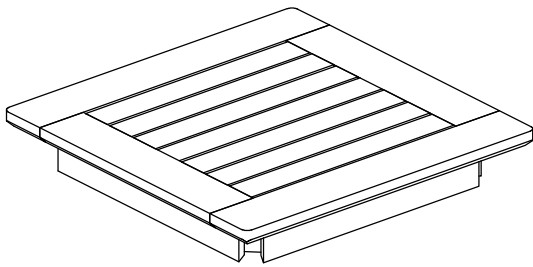




Q'TY 1

II

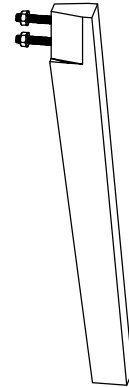


Q'TY 4


HARDWARE LIST

A		8	Hex. Nut	C		1	Spanner
B		8	Washer				


Step 1

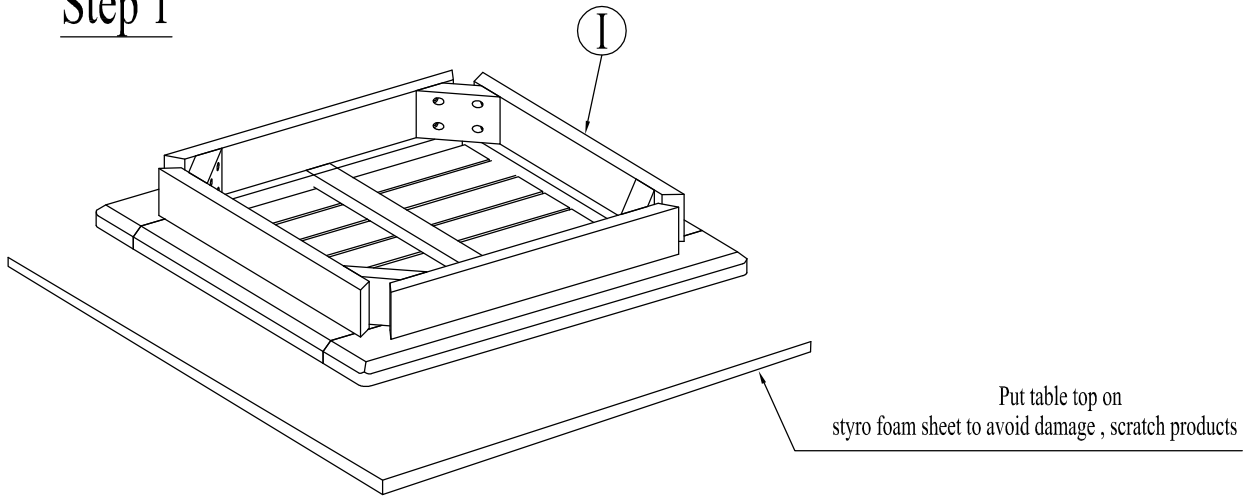


Step 2

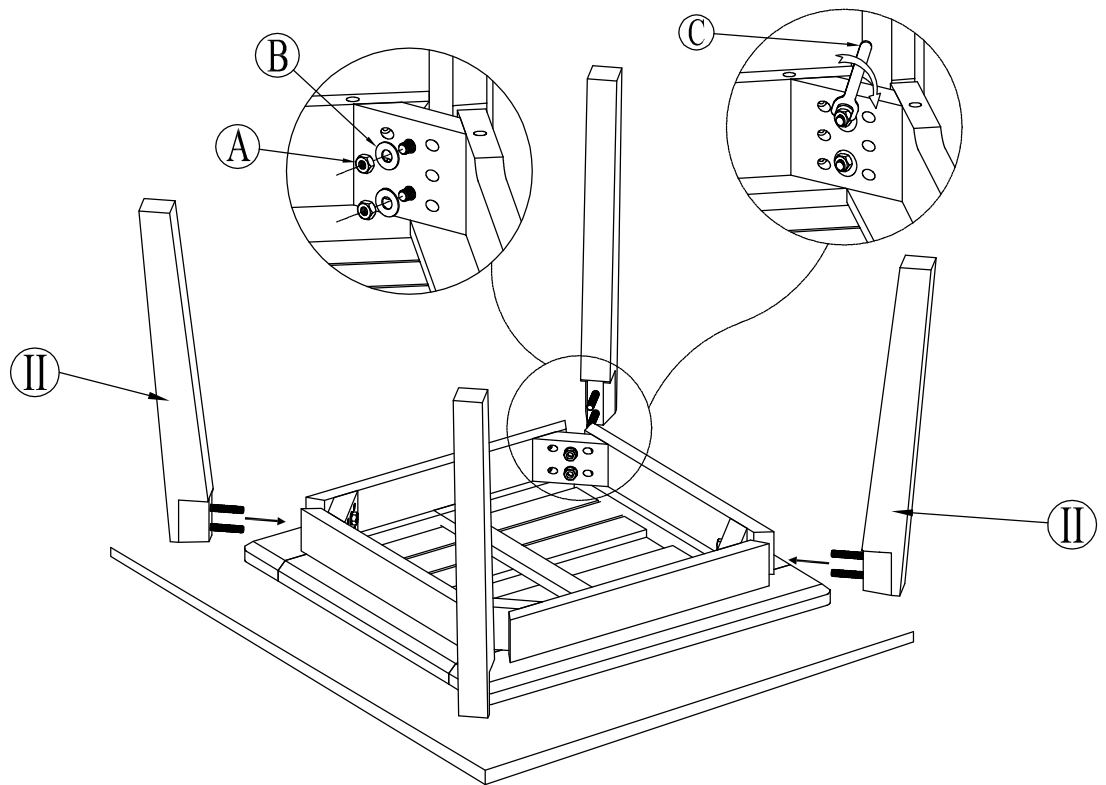


Step 3

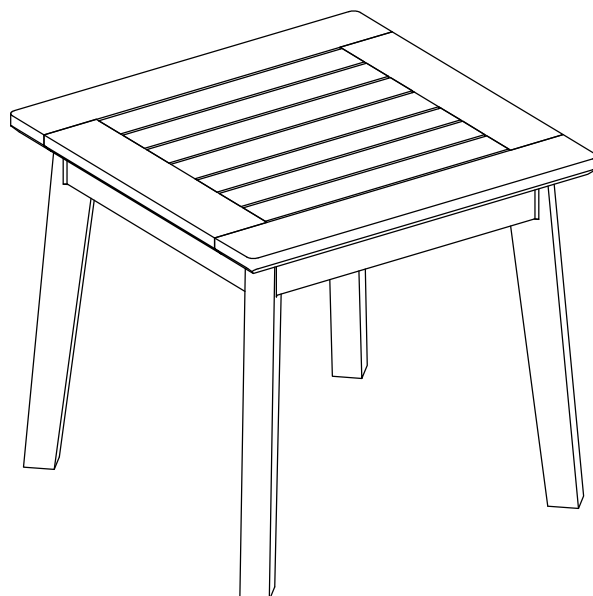

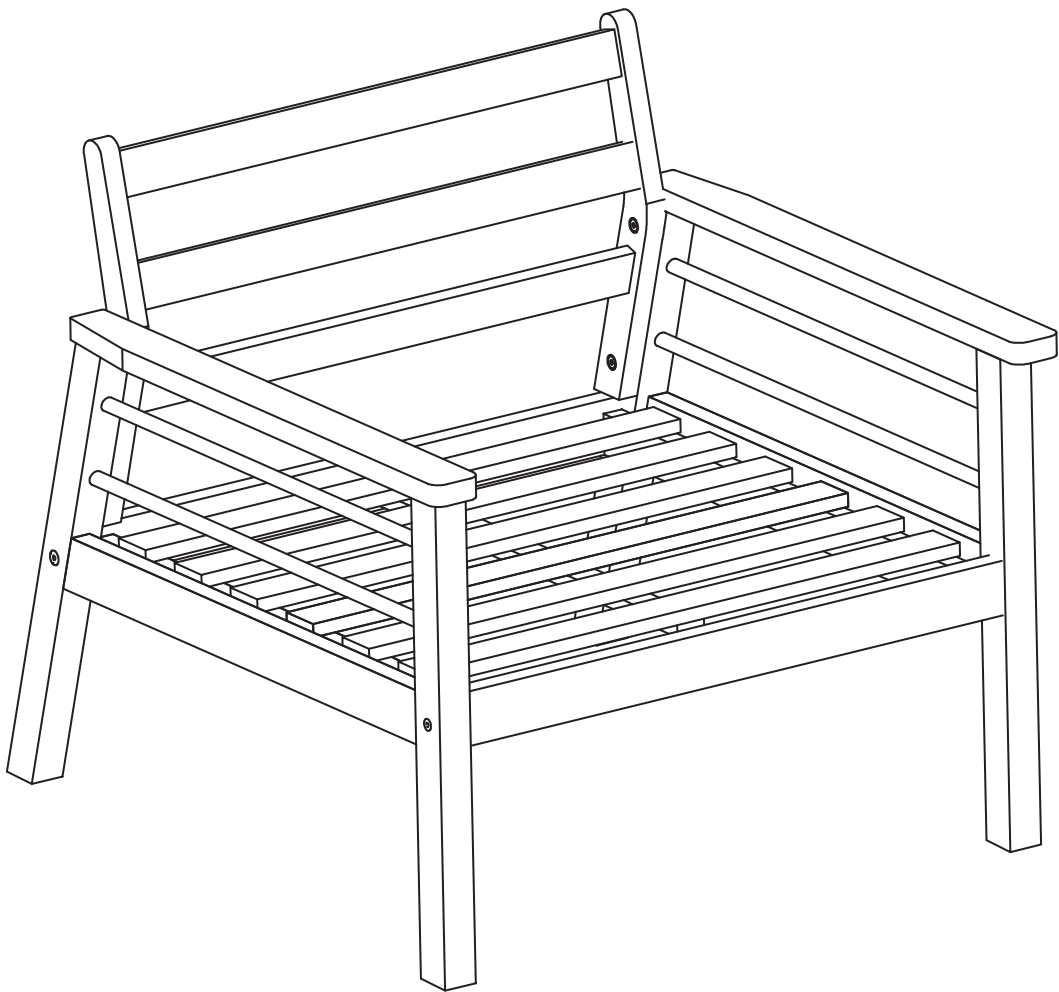







Maximum capacity : 110 kgs/242 Lbs



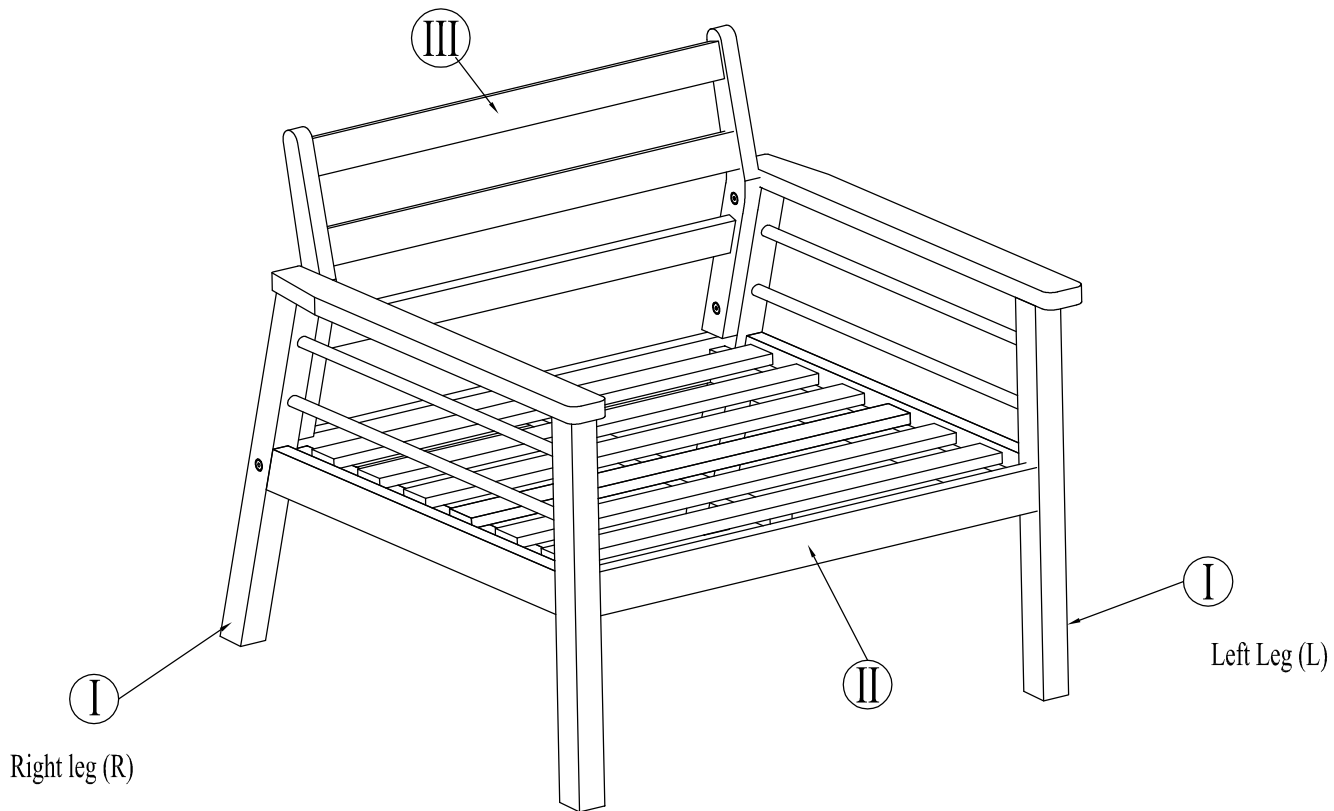




NOTE: 50% TIGHTEN BEFORE FIXING ALL BOLTS & SCREWS

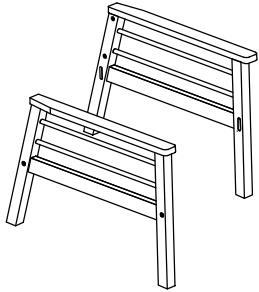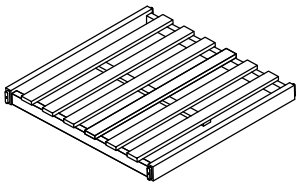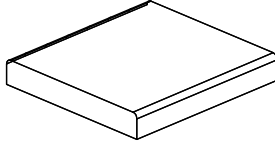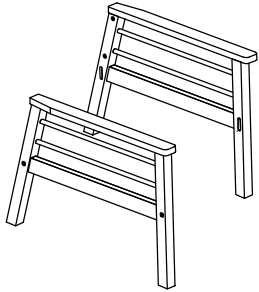
COMPONENTS LIST

<p>Ⓘ</p>  <p>Right leg (R)</p> <p>QTY 2</p>	<p>Ⓜ</p>  <p>QTY 1</p> <p>Ⓜ</p>  <p>QTY 1</p>	<p>Ⓧ</p>  <p>QTY 1</p> <p>Ⓨ</p>  <p>QTY 1</p>
<p>Ⓘ</p>  <p>Left Leg (L)</p>		


HARDWARE LIST

A		4	Screw 7 x 90	C		2	Allen Key
B		4	Bolt 8 x 45				

Step 1

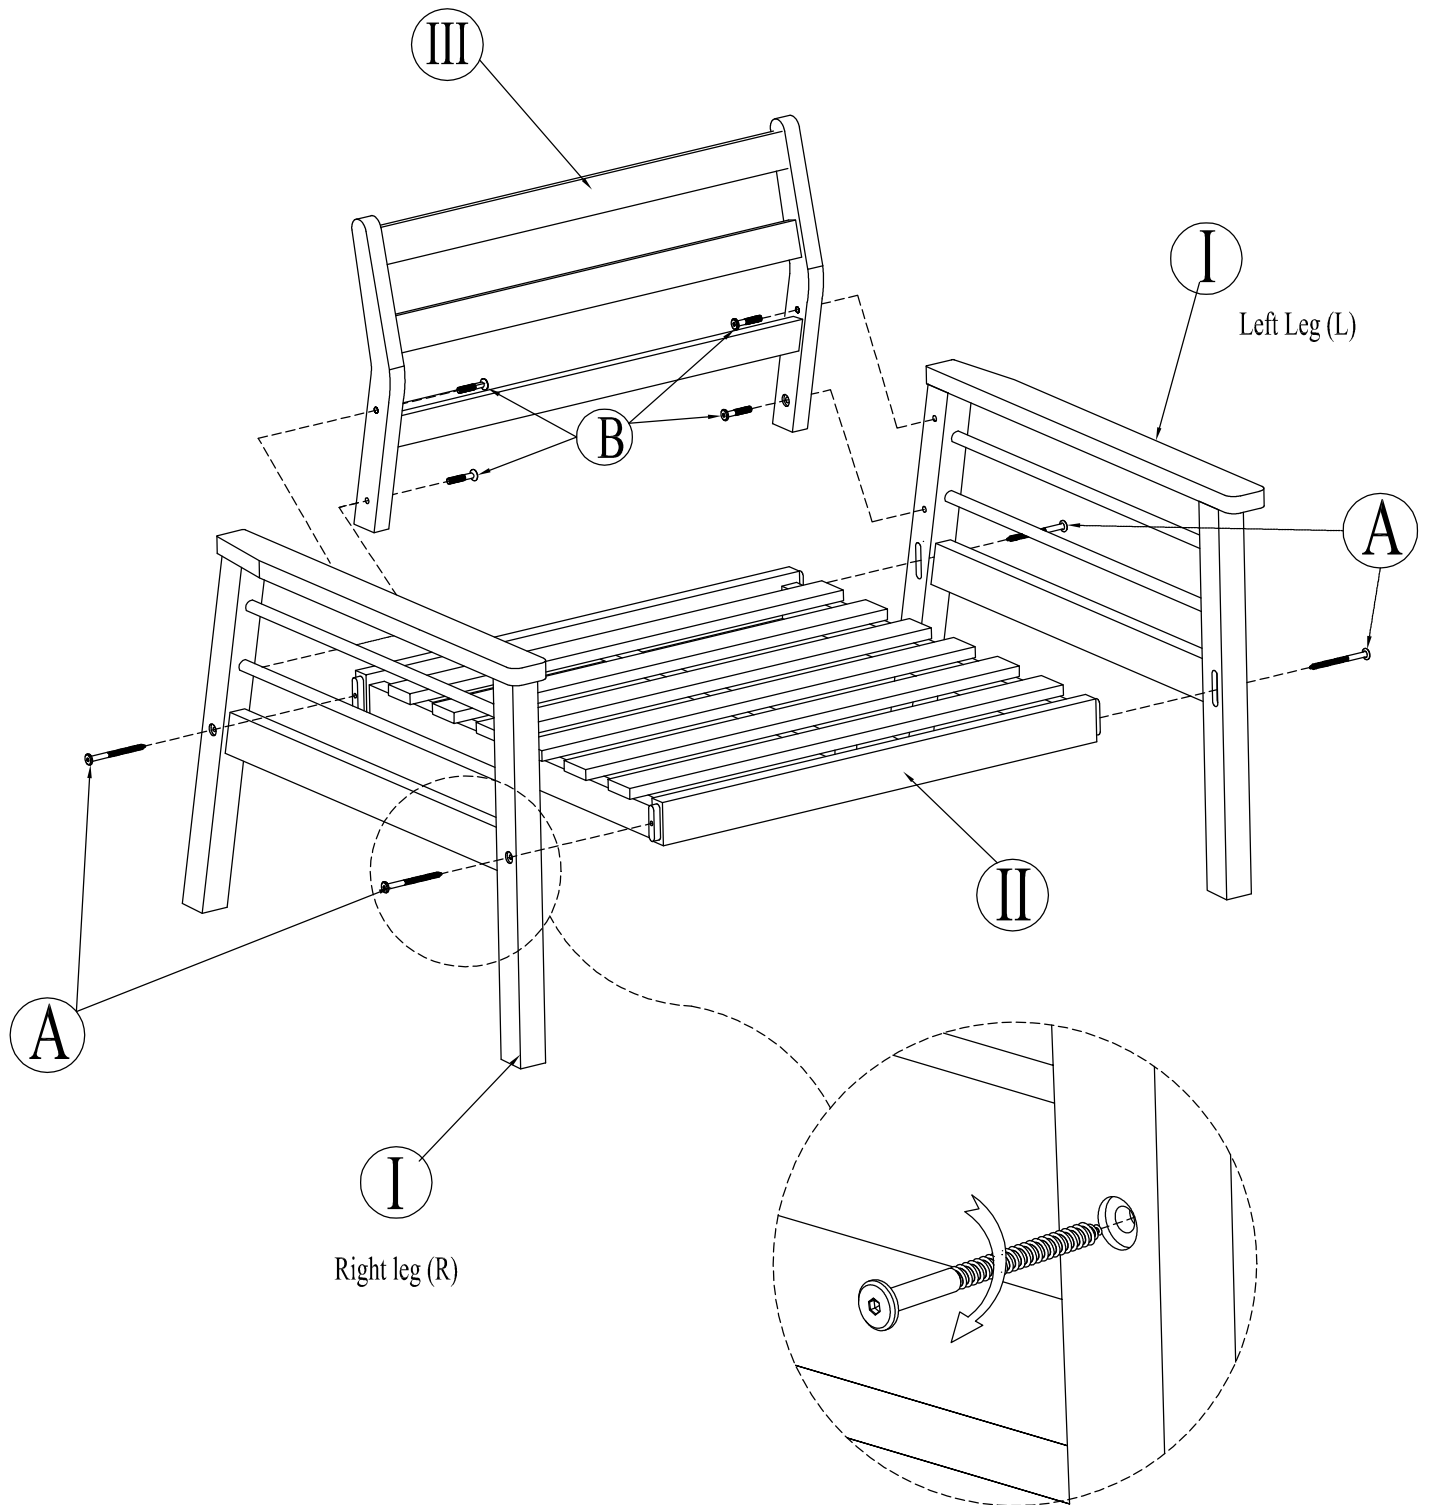

Step 2

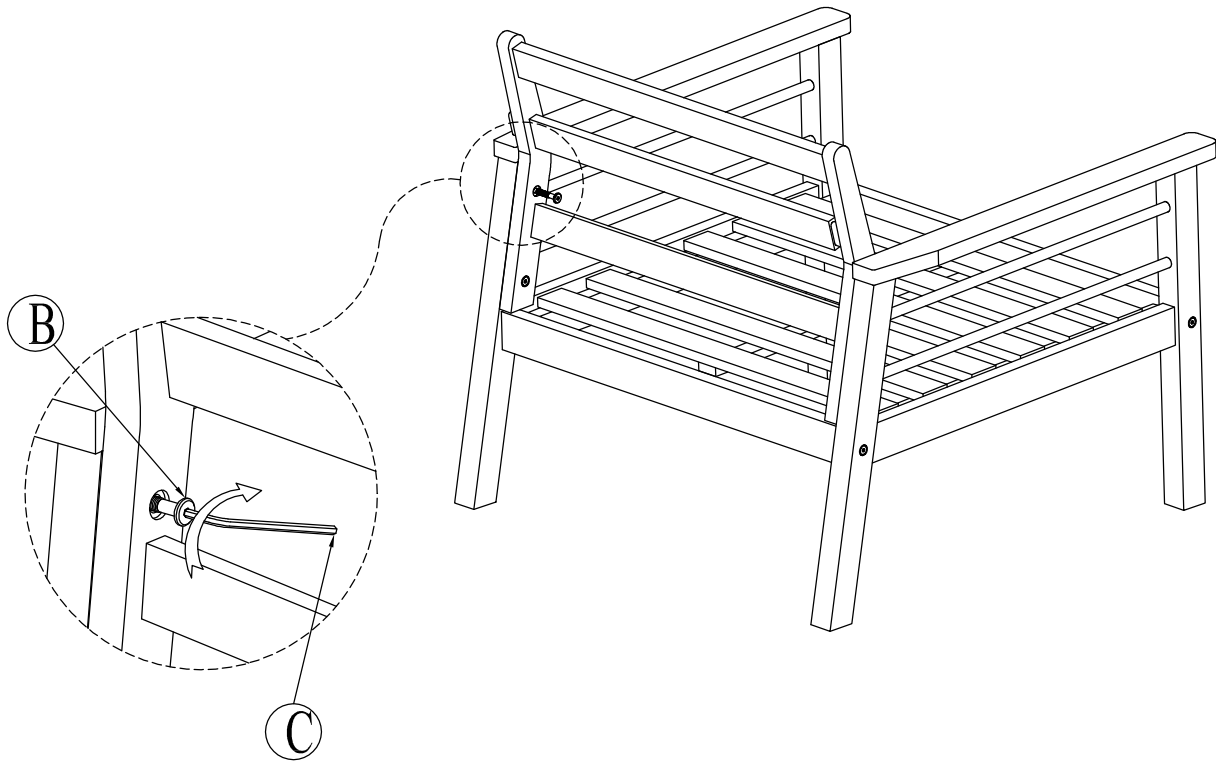

Step 3

